




**ELECTROMECHANICAL MOTOR FOR
SLIDING GATES UP TO 2500 kg.**

TECHNICAL IMAGE

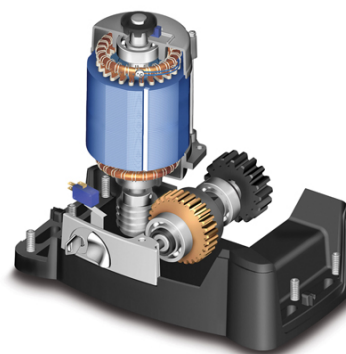

PACKAGING INFORMATION




Size in cm: Length: 38 - Width: 13 - Height: 38.5

Code	Description	Pcs/pallet
------	-------------	------------


G30/2204	Electromechanical motor 230V AC irreversible ideal for sliding gates up to 2200 Kg. with built-in control unit H70, optical encoder and magnetic limit switch.	40
-----------------	--	----

Product technical specifications	G30/2204
Max gate weight	2200 kg
Power line supply	230V AC - 50Hz
Motor power supply	230V AC
Power rating	580W
Frequency of use	50%
Max thrust	1500N
Operating temperature	-20+55°C
Manoeuvre speed	9.5 m/min (0.16 m/s)
Motor thermal protection	150°C
Reductor Type	Irreversible
Limit switch	Magnetic
Onboard control unit	H70/104AC
Encoder	Optical
Maximum dimension product in mm	L346x W180x H362
Number items per pallet	40

PRODUCT DIMENSIONS AND PREPARING FOR INSTALLATION

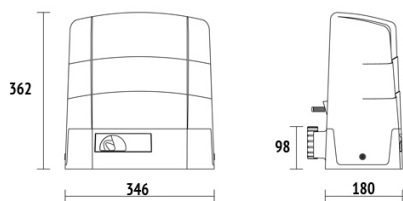

DIMENSIONS

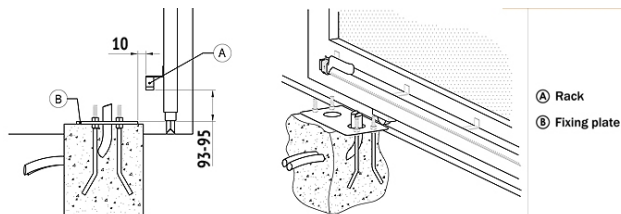

PREDISPOSITION FOR STANDARD INSTALLATION

PRODUCT ACCESSORIES



KT215
Fixing plate with stay bolts and screws G30 series.



KT222
Raised fixing plate for G30 series.



GA550
Galvanised steel rack 22x22x1000 module 4.



GA551
Galvanised steel rack 30x12x1000 module 4 with spacers and screws.



GA553
Nylon rack module 4 with 6 connectors L.1000.



GA554
Pocket of 6 spacers and screws.



LT328
Z17 mod. 4 Pinion with increased thickness H.38



MC775
Kit magnetic limit switch for control unit H70/103AC, H70/104AC and B70/1DC.



R99/C/001
Signboard Automatic Opening".